





-60

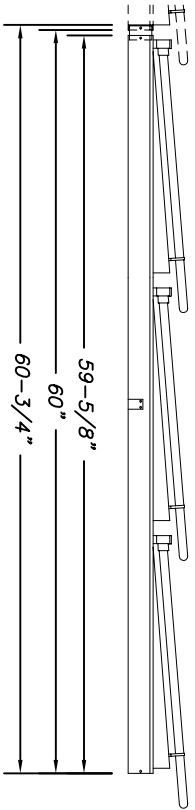

-40

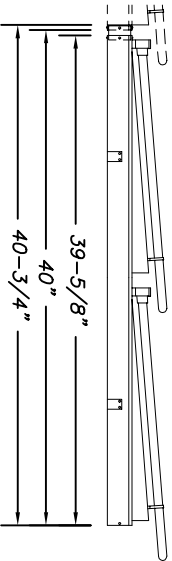

-20

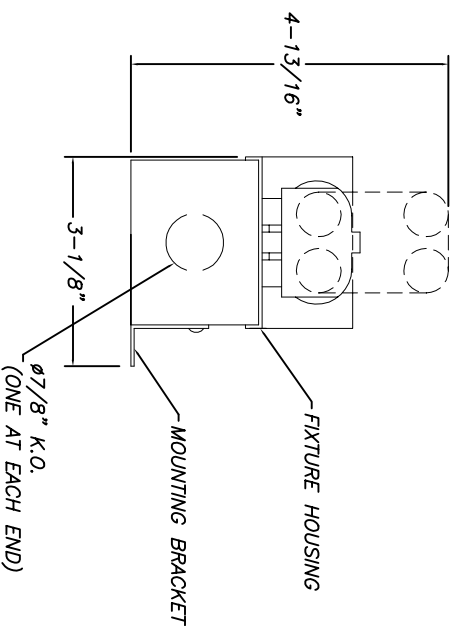

- A. 20" ON CENTER LAMP SPACING
 - B. CONSTRUCTION: FORMED ALUMINUM
 - C. FINISH: SATIN ANODIZED
 - D. ALL DIMENSIONS ARE NOMINAL.
 - E. LAMP LENGTHS MAY VARY FROM MANUFACTURER.
 - F. PLEASE ALLOW A NOMINAL 4" FOR LAMP OVERHANG.
 - G. SPECIAL LAMP CLIP AND MOUNTING BRACKET REQUIRED FOR LAMP DOWN CONFIGURATION. (MUST BE ORDERED SEPARATELY)
- ORDER: P-2013-01-00

2855NX240/50 IS COMPATIBLE WITH 2855FX240/50 LAMP - UP/DOWN SERIES.

^UUS LISTED
DAMP LOCATION

choose one from each category

ORDERING FORMAT					
SERIES	LAMP CONFIGURATION	LAMP	VOLTAGE	BALLAST	LENGTH
2855 linear fixture	NX2 seamless straight lamp up or down	<input type="checkbox"/> 40 watt compact fluorescent <input type="checkbox"/> 50 watt compact fluorescent	<input type="checkbox"/> 120 volt <input type="checkbox"/> 277 volt	<input type="checkbox"/> H high power factor (40 watt, 40" and 20" only) <input type="checkbox"/> E electronic <input type="checkbox"/> D dimming	<input type="checkbox"/> 60" length (3 lamps) <input type="checkbox"/> 40" length (2 lamps) <input type="checkbox"/> 20" length (1 lamp)

JOB NAME: _____

APPROVED FOR FABRICATION: _____

REV.1 6-28-99 DK
REV.2 6-26-00 DK
REV.3 9-13-00 DK




* ALL DIMENSIONS SHOWN ARE IN INCHES



division of
 LIGHTING WORLD INC
 1703 VALLEY ROAD
 OCEAN NJ 07712
 TEL (732) 493-2666
 FAX (732) 493-2941

DATE 3-11-97
 SCALE NTS
 DRAWING NUMBER SUBJ 2855NX40
 SHEET 1 OF 1
 APPROVED NA
 REV.3

THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE.
 STANDARD MODIFIED CUSTOM
 COPYRIGHT © LIGHTING WORLD INC.

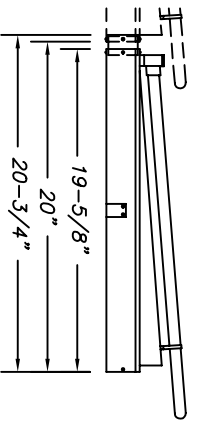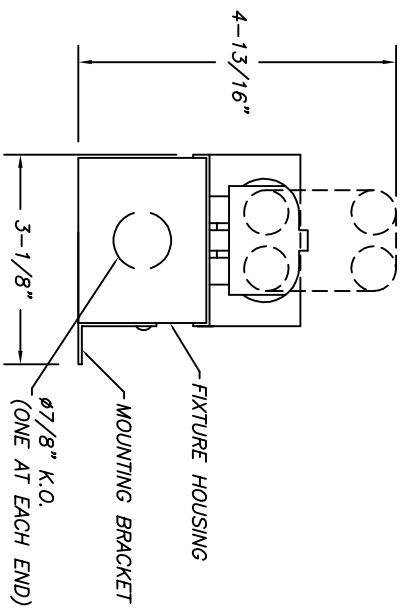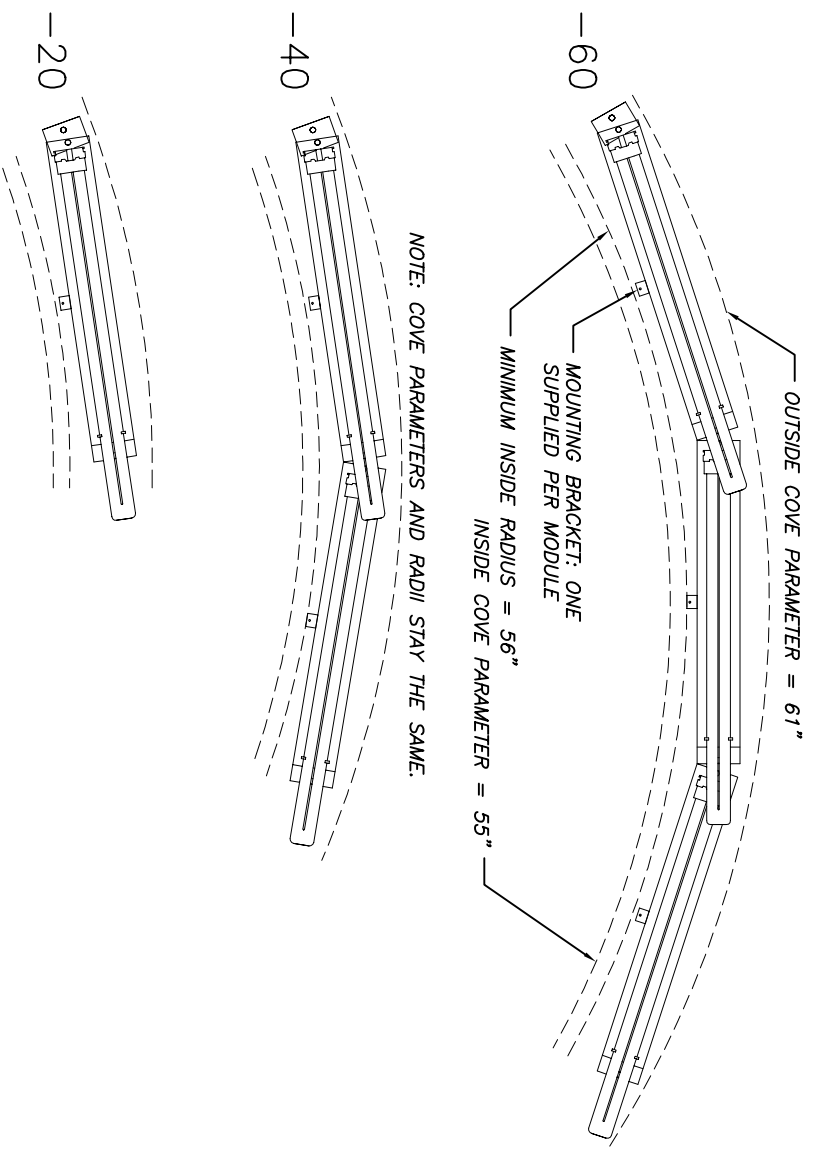

- A. 20" ON CENTER LAMP SPACING
- B. COVE PARAMETERS AND RADIi CONSISTANT FOR ALL LENGTHS
- C. CONSTRUCTION: FORMED ALUMINUM
- D. FINISH: SATIN ANODIZED
- E. ALL DIMENSIONS ARE NOMINAL.
- F. LAMP LENGTHS MAY VARY FROM MANUFACTURER.
- G. PLEASE ALLOW A NOMINAL 4" FOR LAMP OVERHANG.
- H. SPECIAL LAMP CLIP AND MOUNTING BRACKET REQUIRED FOR LAMP DOWN CONFIGURATION. (MUST BE ORDERED SEPARATELY)
- I. FIELD CURVABLE - SHIPS STRAIGHT

JOB NAME: _____

^UUS LISTED
DAMP LOCATION

2855FX240/50 IS COMPATIBLE WITH 2855NX240/50 LAMP - UP/DOWN SERIES.

ORDERING FORMAT

SERIES	LAMP CONFIGURATION	LAMP	VOLTAGE	BALLAST	LENGTH
2855	linear fixture	<input type="checkbox"/> 40 watt compact fluorescent	<input type="checkbox"/> 120 volt	<input type="checkbox"/> H high power factor (40 watt, 40" and 20" only)	<input type="checkbox"/> 60" length (3 lamps)
	field curvable lamp up or down	<input type="checkbox"/> 50 watt compact fluorescent	<input type="checkbox"/> 277 volt	<input type="checkbox"/> E electronic	<input type="checkbox"/> 40" length (2 lamps)
				<input type="checkbox"/> D dimming	<input type="checkbox"/> 20" length (1 lamp)

choose one from each category

APPROVED FOR FABRICATION:
REV.1 6-24-99 DK
REV.2 6-29-00 DK
REV.3 9-13-00 DK

* ALL DIMENSIONS SHOWN ARE IN INCHES



division of
LIGHTING WORLD INC
1703 VALLEY ROAD
OCEAN NJ 07712
TEL (732) 493-2666
FAX (732) 493-2941





THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE.

DATE: 3-11-97
SCALE: NTS
DRAWN: DK
APPROVED: NA

TITLE: FIXTURE #2855FX2-40/50W
SHEET: 1 OF 1
DRAWING NUMBER: SUB\ 2855FX40
REV.3

STANDARD MODIFIED CUSTOM

copyright © Lighting World Inc.

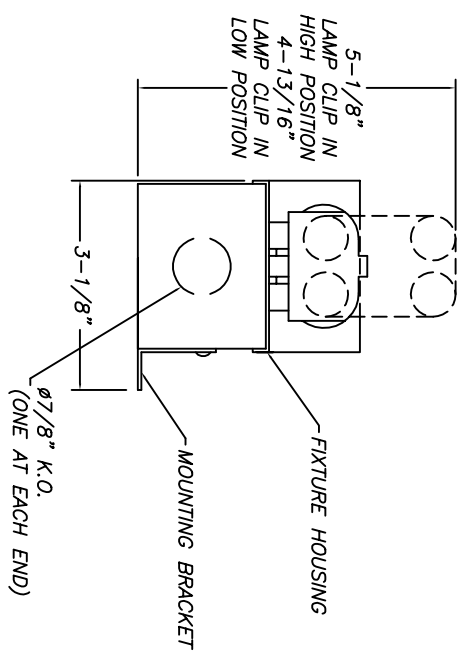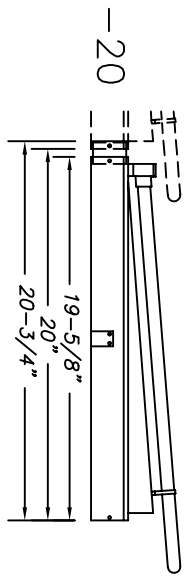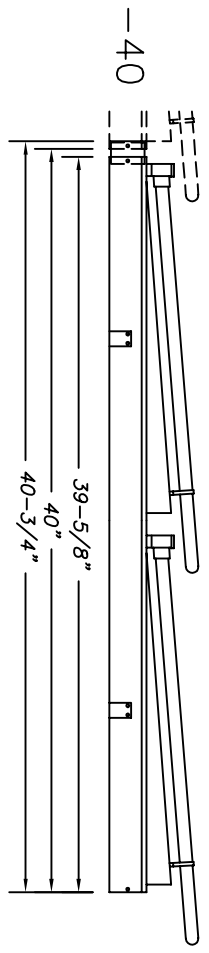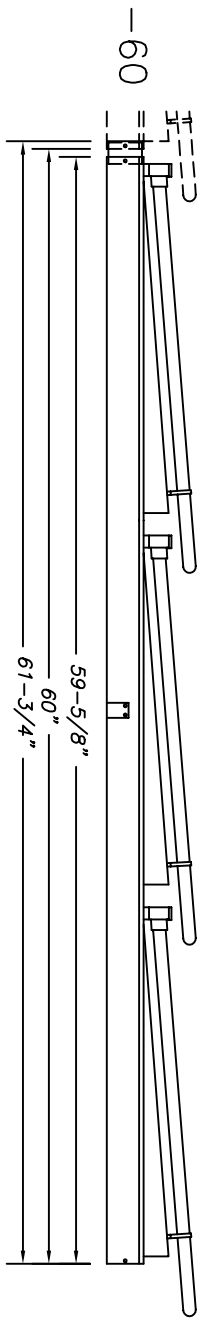

- A. 20" ON CENTER LAMP SPACING
- B. CONSTRUCTION: FORMED ALUMINUM
- C. FINISH: SATIN ANODIZED
- D. ALL DIMENSIONS ARE NOMINAL.
- E. LAMP LENGTHS MAY VARY FROM MANUFACTURER.
- F. PLEASE ALLOW A NOMINAL 4" FOR LAMP OVERHANG.
- G. SPECIAL LAMP CLIP AND MOUNTING BRACKET REQUIRED FOR LAMP DOWN CONFIGURATION. (MUST BE ORDERED SEPARATELY)

2855NX2S40/50 IS COMPATIBLE WITH 2855FX2S40/50 LAMP - IN/OUT SERIES.

^cULUS LISTED
DAMP LOCATION

JOB NAME: _____

ORDERING FORMAT

choose one from each category

SERIES	LAMP CONFIGURATION	LAMP	VOLTAGE	BALLAST	LENGTH
2855 linear fixture	NX2S seamless straight lamp up or down	<input type="checkbox"/> 40 watt compact fluorescent <input type="checkbox"/> 50 watt compact fluorescent	<input type="checkbox"/> 120 volt <input type="checkbox"/> 277 volt	<input type="checkbox"/> H high power factor (40 watt, 40" and 20" only) <input type="checkbox"/> E electronic <input type="checkbox"/> D dimming	<input type="checkbox"/> 60" length (3 lamps) <input type="checkbox"/> 40" length (2 lamps) <input type="checkbox"/> 20" length (1 lamp)

APPROVED FOR FABRICATION:
REV.1 6-28-99 DK
REV.2 9-13-00 DK

* ALL DIMENSIONS SHOWN ARE IN INCHES




division of
LIGHTING WORLD INC
1703 VALLEY ROAD
OCEAN NJ 07712
TEL (732) 493-2666
FAX (732) 493-2941






TITLE: FIXTURE #2855NX2S-40/50W
DATE: 3-11-97
SCALE: NTS
DRAWN: DK
APPROVED: NA
SHEET: 1 OF 1
DRAWING NUMBER: SUBJ: 285540NX
REV.2

THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE. STANDARD MODIFIED CUSTOM
copyright © LIGHTING WORLD INC.

LAMP OUT
NOTE: LAMP CLIP IN LOW POSITION.

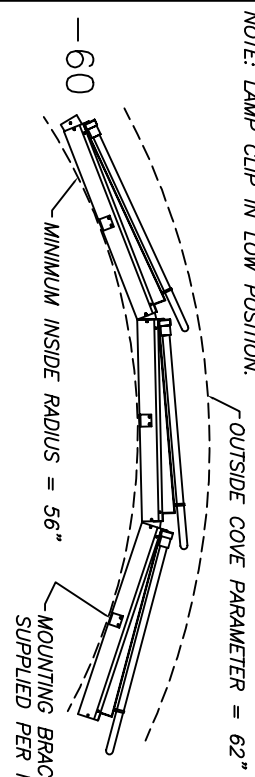

LAMP IN
NOTE: LAMP CLIP IN HIGH POSITION.

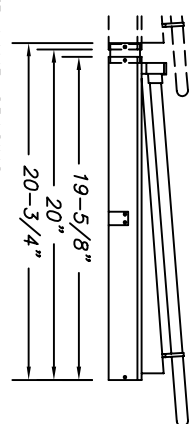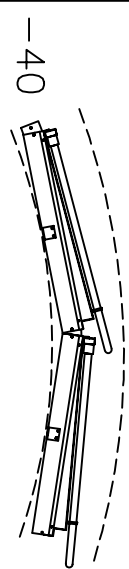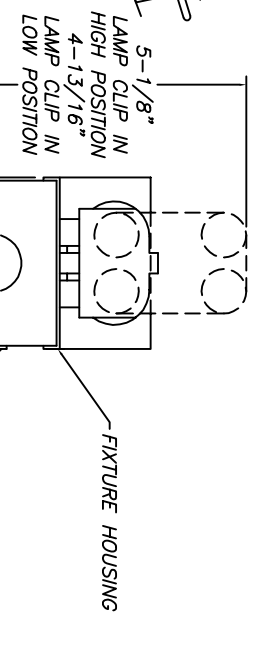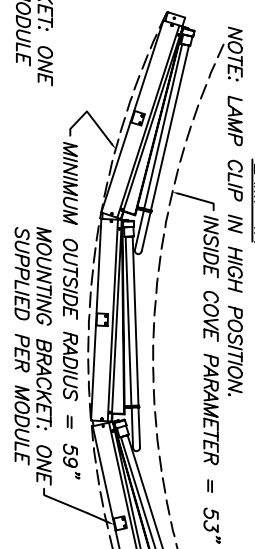

- A. 20" ON CENTER LAMP SPACING
- B. COVE PARAMETERS AND RADIi CONSISTANT FOR ALL LENGTHS
- C. CONSTRUCTION: FORMED ALUMINUM
- D. FINISH: SATIN ANODIZED
- E. ALL DIMENSIONS ARE NOMINAL.
- F. LAMP LENGTHS MAY VARY FROM MANUFACTURER.
- G. PLEASE ALLOW A NOMINAL 4" FOR LAMP OVERRANG.
- H. SPECIAL LAMP CLIP AND MOUNTING BRACKET REQUIRED FOR LAMP DOWN CONFIGURATION. (MUST BE ORDERED SEPARATELY)
- I. FIELD CURVABLE - SHIPS STRAIGHT

2855FX2S40/50 IS COMPATIBLE WITH 2855NX2S40/50 LAMP - IN/OUT SERIES.

UL LISTED
DAMP LOCATION

ORDERING FORMAT choose one from each category

SERIES	LAMP CONFIGURATION	LAMP	VOLTAGE	BALLAST	LENGTH
2855	linear fixture	<input type="checkbox"/> 40 watt compact fluorescent	<input type="checkbox"/> 1 120 volt	<input type="checkbox"/> H high power factor (40 watt, 40" and 20" only)	<input type="checkbox"/> 60" length (3 lamps)
	field curvable lamp up or down	<input type="checkbox"/> 50 watt compact fluorescent	<input type="checkbox"/> 2 277 volt	<input type="checkbox"/> E electronic	<input type="checkbox"/> 40" length (2 lamps)
				<input type="checkbox"/> D dimming	<input type="checkbox"/> 20" length (1 lamp)

JOB NAME: _____

APPROVED FOR FABRICATION: _____
 REV. 10 9-17-99 DK
 REV. 11 9-13-00 DK



division of
 LIGHTING WORLD INC
 1703 VALLEY ROAD
 OCEAN NJ 07712
 TEL (732) 493-2666
 FAX (732) 493-2941

THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE.

* ALL DIMENSIONS SHOWN ARE IN INCHES

DATE 10-4-94
 SCALE NTS
 DRAWING NUMBER SUBJ 2855FX2S
 SHEET 1 OF 1
 APPROVED NA
 STANDARD MODIFIED CUSTOM
 COPYRIGHT © LIGHTING WORLD INC.