

- A. 8" ON CENTER LAMP SPACING
- B. COVE PARAMETERS AND RADIi CONSISTANT FOR ALL LENGTHS
- C. CONSTRUCTION: FORMED ALUMINUM
- D. FINISH: SATIN ANODIZED
- E. ALL DIMENSIONS ARE NOMINAL.
- F. LAMP LENGTHS MAY VARY FROM MANUFACTURER
- G. FIELD CURVABLE - SHIPS STRAIGHT

2880FX226 IS COMPATIBLE WITH 2880NXX226 LAMP - UP/DOWN SERIES.

LISTED  
 DAMP LOCATION

| ORDERING FORMAT     |                                       |  |  |   |   |
|---------------------|---------------------------------------|--|--|---|---|
| SERIES              | LAMP CONFIGURATION                    | LAMP   | VOLTAGE  | BALLAST   | LENGTH  |
| 2880 linear fixture | FX2 seamless straight lamp up or down | <input type="checkbox"/> 26 watt quad compact fluorescent (G24d-3)<br><input type="checkbox"/> 26 watt quad compact fluorescent (G24q-3) | <input type="checkbox"/> 120 volt<br><input type="checkbox"/> 277 volt | <input type="checkbox"/> H high power factor (G24d-3 base)<br><input type="checkbox"/> E electronic (G24q-3 base) | <input type="checkbox"/> 48" length (6 lamps)<br><input type="checkbox"/> 24" length (3 lamps)<br><input type="checkbox"/> 8" length (1 lamp) |

choose one from each category

JOB NAME: \_\_\_\_\_

APPROVED FOR FABRICATION:  
 REV.8 12-2-98 DK  
 REV.9 1-29-01 DK

\* ALL DIMENSIONS SHOWN ARE IN INCHES





division of  
 LIGHTING WORLD INC  
 1703 VALLEY ROAD  
 OCEAN, NJ 07712  
 TEL (732) 493-2666  
 FAX (732) 493-2941

TITLE: \_\_\_\_\_  
 DATE: 4-12-95  
 SCALE: NTS  
 SHEET: 1 OF 1  
 DRAWING NUMBER: SUB\ 2880FX2  
 FXTURE #2880-FX2-26W  
 APPROVED: NA

THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE.

STANDARD  MODIFIED  CUSTOM

COPYRIGHT © LIGHTING WORLD INC.

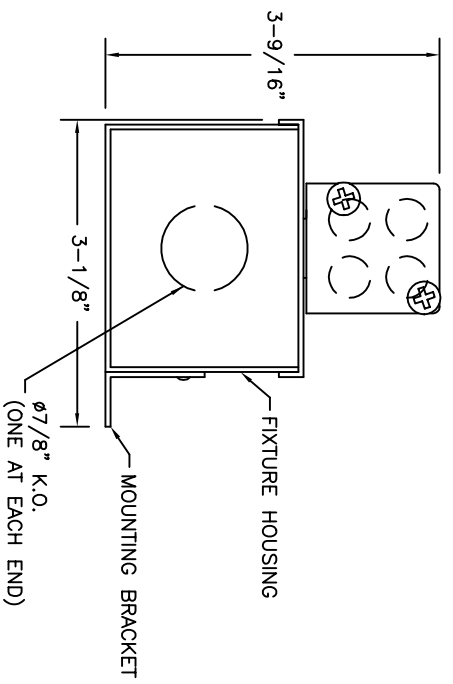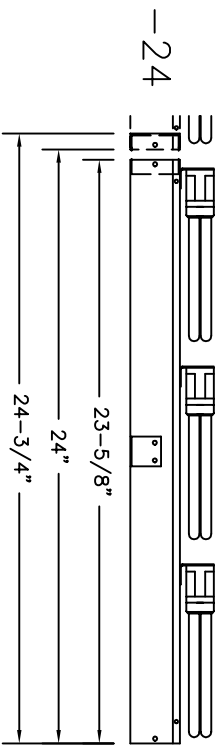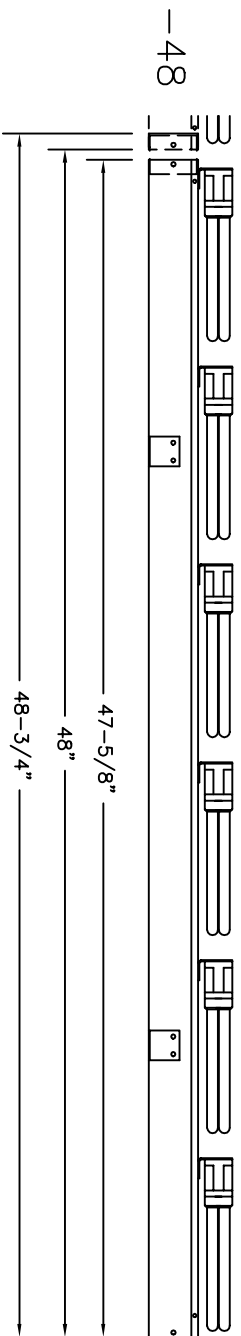

- A. 8" ON CENTER LAMP SPACING.
- B. CONSTRUCTION: FORMED ALUMINUM
- C. FINISH: SATIN ANODIZED
- D. ALL DIMENSIONS ARE NOMINAL.
- E. LAMP LENGTHS MAY VARY FROM MANUFACTURER
- F. LAMP OUT ONLY

2880NX2S26 IS COMPATIBLE WITH 2880FX2S26 LAMP - IN/OUT SERIES.

**UL** LISTED  
DAMP LOCATION

choose one from each category

| ORDERING SERIES | LAMP CONFIGURATION | LAMP   | VOLTAGE                           | BALLAST  | LENGTH  |
|-----------------|--------------------|--|-----------------------------------|--|---|
| 2880            | linear fixture     | <input type="checkbox"/> 26 watt quad compact fluorescent (G24d-3) | <input type="checkbox"/> 120 volt | <input type="checkbox"/> H high power factor (G24d-3 base) | <input type="checkbox"/> 48" length (6 lamps) |
|                 |                    | <input type="checkbox"/> 26 watt quad compact fluorescent (G24q-3) | <input type="checkbox"/> 277 volt | <input type="checkbox"/> E electronic (G24Q-3 base)        | <input type="checkbox"/> 24" length (3 lamps) |
|                 |                    |  |                                   |  | <input type="checkbox"/> 8" length (1 lamp)   |

JOB NAME: \_\_\_\_\_

APPROVED FOR FABRICATION:  
REV. 5 12-2-98 DK  
REV. 6 1-30-01 DK

\* ALL DIMENSIONS SHOWN ARE IN INCHES




division of  
LIGHTING WORLD INC  
1703 VALLEY ROAD  
OCEAN NJ 07712  
TEL (732) 493-2666  
FAX (732) 493-2941

| DATE    | SCALE | DRAWN | APPROVED |
|---------|-------|-------|----------|
| 3-20-97 | NTS   | DK    | NA       |

SHEET 1 OF 1 DRAWING NUMBER 2880NX2S REV. 6

THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE.  STANDARD  MODIFIED  CUSTOM

OUTSIDE COVE PARAMETER = 26"



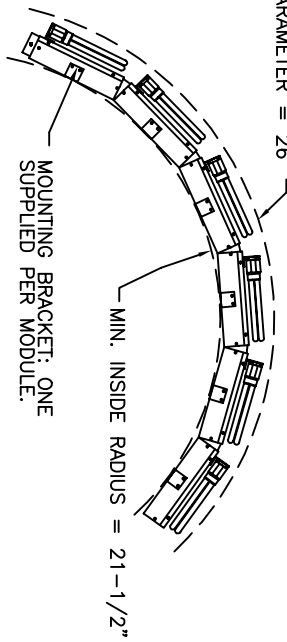


-48

-24



-8

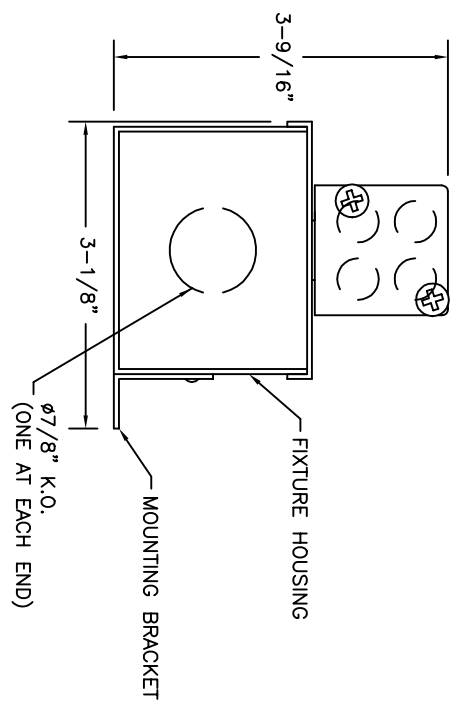

- A. 8" ON CENTER LAMP SPACING
- B. COVE PARAMETERS AND RADI CONSTANT FOR ALL LENGTHS
- C. CONSTRUCTION: FORMED ALUMINUM
- D. FINISH: SATIN ANODIZED
- E. ALL DIMENSIONS ARE NOMINAL.
- F. LAMP LENGTHS MAY VARY FROM MANUFACTURER
- G. FIELD CURVABLE - SHIPS STRAIGHT
- H. LAMP OUT ONLY

2880FX2S26 IS COMPATIBLE WITH 2880NX2S26 LAMP - IN/OUT SERIES.

**UL** LISTED  
DAMP LOCATION

choose one from each category

| ORDERING SERIES     | LAMP CONFIGURATION | LAMP   | VOLTAGE  | BALLAST   | LENGTH  |
|---------------------|--------------------|--|--|---|---|
| 2880 linear fixture | FX2S lamp out only | <input type="checkbox"/> 26 watt quad compact fluorescent (G24d-3)<br><input type="checkbox"/> 26 watt quad compact fluorescent (G24q-3) | <input type="checkbox"/> 120 volt<br><input type="checkbox"/> 277 volt | <input type="checkbox"/> H high power factor (G24d-3 base)<br><input type="checkbox"/> E electronic (G24Q-3 base) | <input type="checkbox"/> 48" length (6 lamps)<br><input type="checkbox"/> 24" length (3 lamps)<br><input type="checkbox"/> 8" length (1 lamp) |

JOB NAME: \_\_\_\_\_

APPROVED FOR FABRICATION:  
REV.8 11-30-98 DK  
REV.9 1-29-01 DK

\* ALL DIMENSIONS SHOWN ARE IN INCHES

BELFER

division of  
LIGHTING WORLD INC  
1703 VALLEY ROAD  
OCEAN, NJ 07712  
TEL (732) 493-2666  
FAX (732) 493-2941

TITLE: FIXTURE #2880FX2S-26W  
DATE: 8-21-95  
SCALE: NTS  
SHEET: 1 OF 1  
DRAWING NUMBER: SUB\ 2880FX2S REV.9

THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE.

STANDARD MODIFIED CUSTOM

COPYRIGHT © LIGHTING WORLD INC.