

- A. 8" ON CENTER LAMP SPACING
- B. COVE PARAMETERS AND RADI CONSISTANT FOR ALL LENGTHS
- C. CONSTRUCTION: FORMED ALUMINUM
- D. FINISH: SATIN ANODIZED
- E. ALL DIMENSIONS ARE NOMINAL
- F. LAMP LENGTHS MAY VARY FROM MANUFACTURER

2880NX232/42 IS COMPATIBLE WITH 2880FX232/42 LAMP - UP/DOWN SERIES.

LISTED
DAMP LOCATION

ORDERING FORMAT choose one from each category

SERIES	LAMP CONFIGURATION	LAMP	VOLTAGE	BALLAST	LENGTH
2880	linear fixture	<input type="checkbox"/> 32 32 watt hex compact fluorescent (G24q-3)	<input type="checkbox"/> 1 120 volt	<input type="checkbox"/> E electronic	<input type="checkbox"/> 48" 48" length (6 lamps)
	NX2 seamless straight lamp up or down fixture	<input type="checkbox"/> 42 42 watt hex compact fluorescent (G24q-4)	<input type="checkbox"/> 2 277 volt		<input type="checkbox"/> 24" 24" length (3 lamps)
					<input type="checkbox"/> 8" 8" length (1 lamp)

JOB NAME: _____

APPROVED FOR FABRICATION: _____

REV.1 02-07-01 DK

* ALL DIMENSIONS SHOWN ARE IN INCHES

BELFER

division of
LIGHTING WORLD INC
1703 VALLEY ROAD
OCEAN NJ 07712
TEL (732) 493-2666
FAX (732) 493-2941

TITLE
FIXTURE #2880NX2-32W & 42W

DATE
1-18-99

SHEET
1 OF 1

DRAWING NUMBER
SUBJ 2880NX232

SCALE
NTS

DRAWN
DK




APPROVED
NA

STANDARD

MODIFIED

THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE.

COPYRIGHT © LIGHTING WORLD INC.

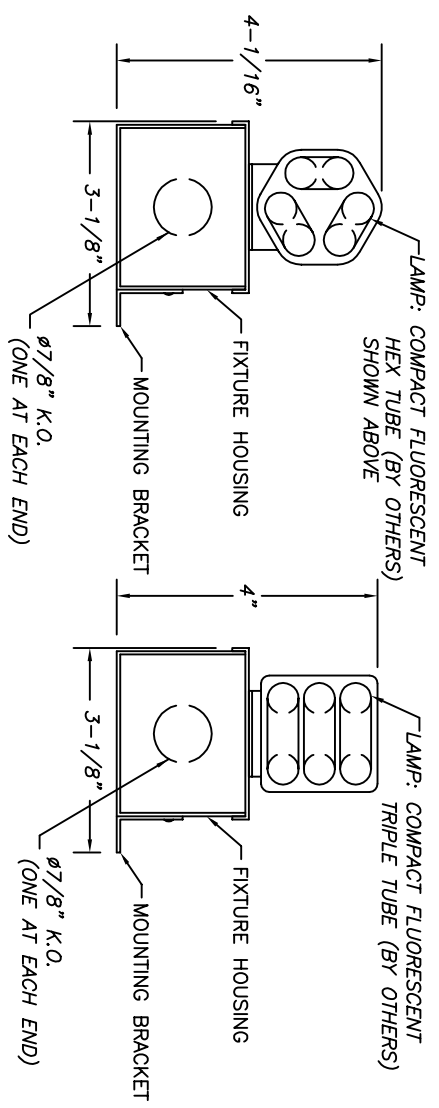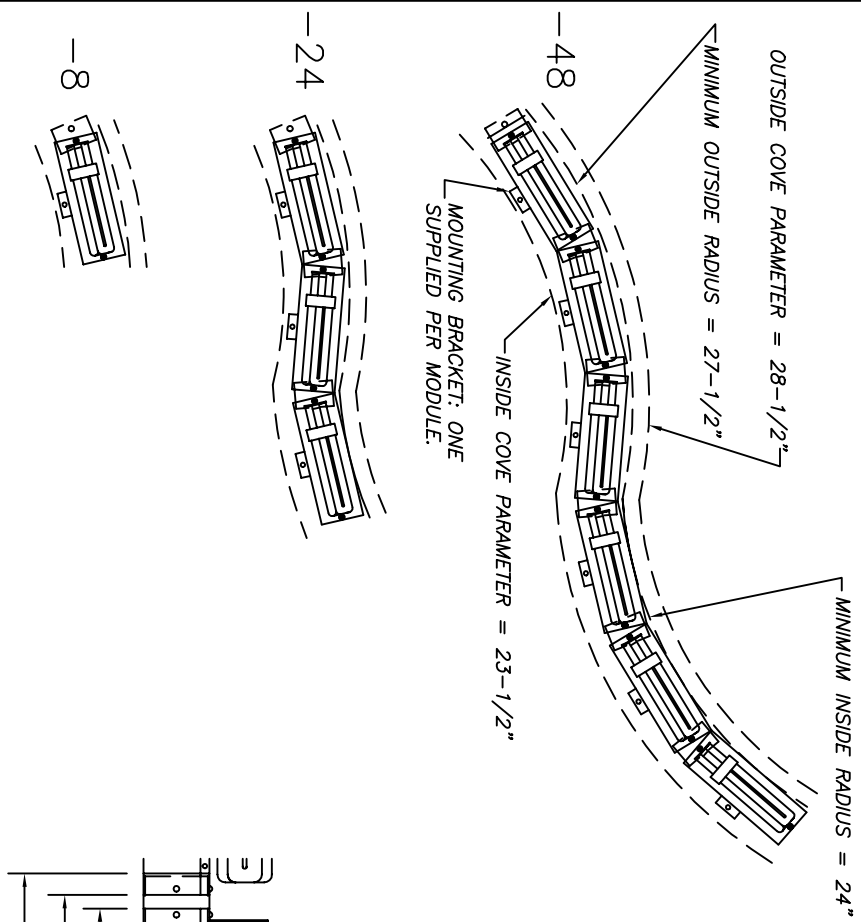

- A. 8" ON CENTER LAMP SPACING
- B. COVE PARAMETERS AND RADIi CONSISTANT FOR ALL LENGTHS
- C. CONSTRUCTION: FORMED ALUMINUM
- D. FINISH: SATIN ANODIZED
- E. ALL DIMENSIONS ARE NOMINAL
- F. LAMP LENGTHS MAY VARY FROM MANUFACTURER

2880FX232/42 IS COMPATIBLE WITH 2880NX232/42 LAMP - UP/DOWN SERIES.

UL LISTED
DAMP LOCATION

choose one from each category

ORDERING FORMAT	LAMP CONFIGURATION	LAMP	VOLTAGE	BALLAST	LENGTH
2880 linear fixture	FX2 lamp up or down	<input type="checkbox"/> 32 watt hex compact fluorescent (G24q-3) <input type="checkbox"/> 42 watt hex compact fluorescent (G24q-4)	<input type="checkbox"/> 120 volt <input type="checkbox"/> 277 volt	<input type="checkbox"/> E electronic	<input type="checkbox"/> 48" length (6 lamps) <input type="checkbox"/> 24" length (3 lamps) <input type="checkbox"/> 8" length (1 lamp)

JOB NAME: _____

APPROVED FOR FABRICATION: _____

REV. 1 02-07-01 DK

* ALL DIMENSIONS SHOWN ARE IN INCHES



BELFER division of LIGHTING WORLD INC
 1703 VALLEY ROAD
 OCEAN NJ 07712
 TEL (732) 493-2666
 FAX (732) 493-2941

DATE: 1-14-99 SCALE: NTS DRAWN: DK APPROVED: NA
 SHEET 1 OF 1 DRAWING NUMBER: SUB\ 2880FX32 REV. 1

THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE.

STANDARD MODIFIED CUSTOM

copyright © Lighting World Inc.

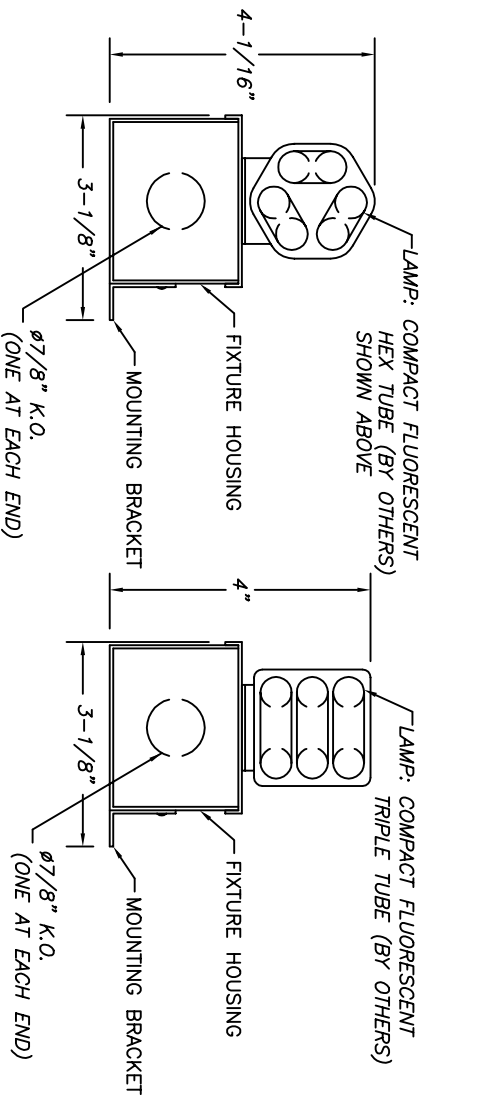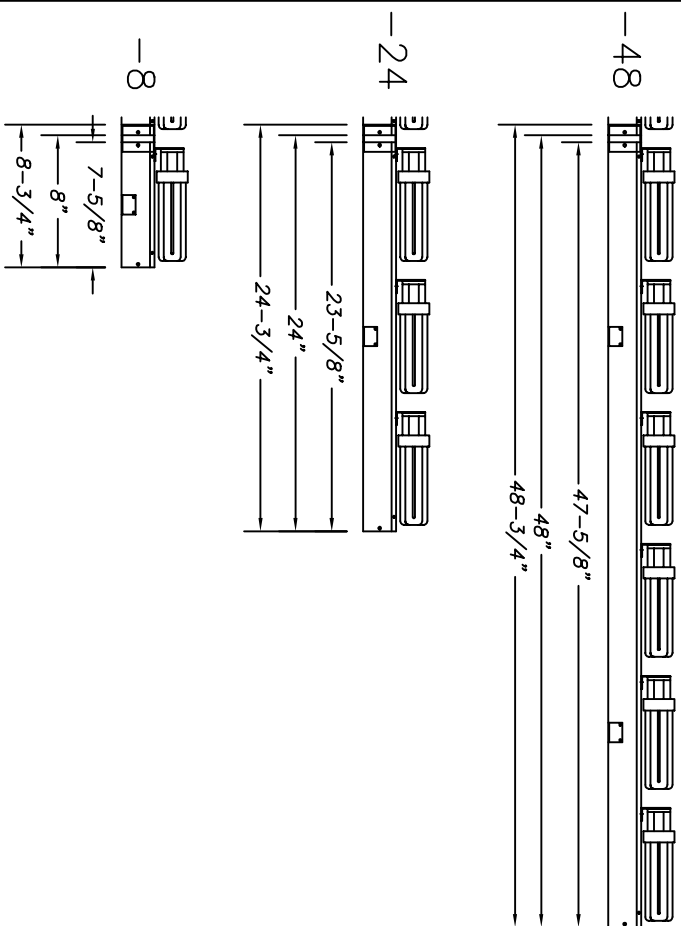

- A. 8" ON CENTER LAMP SPACING
- B. COVE PARAMETERS AND RADI CONSISTANT FOR ALL LENGTHS
- C. CONSTRUCTION: FORMED ALUMINUM
- D. FINISH: SATIN ANODIZED
- E. ALL DIMENSIONS ARE NOMINAL
- F. LAMP LENGTHS MAY VARY FROM MANUFACTURER
- G. LAMP OUT ONLY

2880NX2S32/42 IS COMPATIBLE WITH 2880FX2S32/42 LAMP - OUT SERIES.

LISTED
DAMP LOCATION

choose one from each category

ORDERING SERIES	LAMP CONFIGURATION	LAMP	VOLTAGE	BALLAST	LENGTH
2880 linear fixture	NX2S lamp out only	<input type="checkbox"/> 32 watt hex compact fluorescent (G24q-3) <input type="checkbox"/> 42 watt hex compact fluorescent (G24q-4)	<input type="checkbox"/> 120 volt <input type="checkbox"/> 277 volt	<input type="checkbox"/> E electronic	<input type="checkbox"/> 48" length (6 lamps) <input type="checkbox"/> 24" length (3 lamps) <input type="checkbox"/> 8" length (1 lamp)

JOB NAME: _____

APPROVED FOR FABRICATION: _____

REV. 1 02-07-01 DK

* ALL DIMENSIONS SHOWN ARE IN INCHES






BELFER

division of
LIGHTING WORLD INC
1703 VALLEY ROAD
OCEAN NJ 07712
TEL (732) 493-2666
FAX (732) 493-2941

TITLE: FIXTURE #2880NX2S-32W & 42W
DATE: 1-14-99
SCALE: NTS
SHEET: 1 OF 1
DRAWING NUMBER: SUB\ 2880NS32
REV. 1

THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE. STANDARD MODIFIED CUSTOM
COPYRIGHT © LIGHTING WORLD INC.

LAMP OUT
(LAMP IN NOT AVAILABLE)

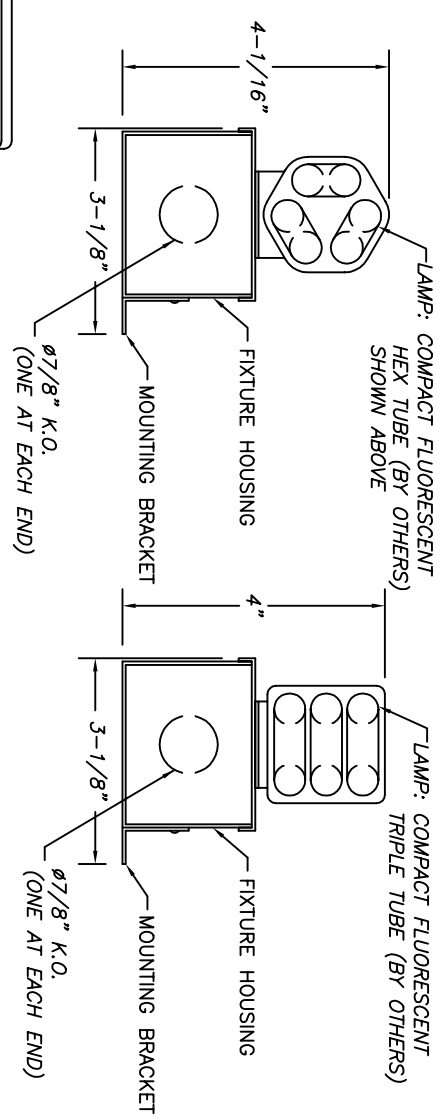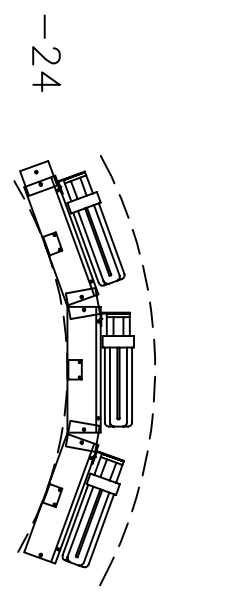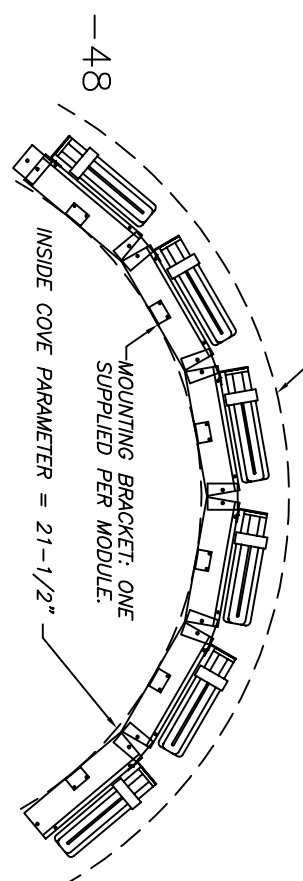

2880FX2S32/42 IS COMPATIBLE WITH 2880NX2S32/42 LAMP - OUT SERIES.

^(UL) LISTED
DAMP LOCATION

ORDERING FORMAT

SERIES	LAMP CONFIGURATION	LAMP	VOLTAGE	BALLAST	LENGTH
2880 linear fixture	FX2S seamless straight lamp out only	<input type="checkbox"/> 32 32 watt hex compact fluorescent (G24q-3)	<input type="checkbox"/> 1 120 volt	<input type="checkbox"/> E electronic	<input type="checkbox"/> 48 48" length (6 lamps)
		<input type="checkbox"/> 42 42 watt hex compact fluorescent (G24q-4)	<input type="checkbox"/> 2 277 volt		<input type="checkbox"/> 24 24" length (3 lamps)
					<input type="checkbox"/> 8" length (1 lamp)

choose one from each category

- A. 8" ON CENTER LAMP SPACING
- B. COVE PARAMETERS AND RADIi CONSISTANT FOR ALL LENGTHS
- C. CONSTRUCTION: FORMED ALUMINIUM
- D. FINISH: SATIN ANODIZED
- E. ALL DIMENSIONS ARE NOMINAL
- F. LAMP LENGTHS MAY VARY FROM MANUFACTURER
- G. FIELD CURVABLE - SHIPS STRAIGHT
- H. LAMP OUT ONLY

JOB NAME: _____

APPROVED FOR FABRICATION: _____
REV.1 02-07-01 DK

* ALL DIMENSIONS SHOWN ARE IN INCHES

BELFER division of LIGHTING WORLD, INC.
1703 VALLEY ROAD OCEAN NJ 07712
TEL (732) 493-2666 FAX (732) 493-2941

DATE 1-14-99 SCALE NTS DRAWN DK APPROVED MA
SHEET 1 OF 1 DRAWING NUMBER SUB\ 2880FS32 REV.1

THIS DOCUMENT IS THE PROPERTY OF LIGHTING WORLD INC. NO. RIGHTS ARE GRANTFD FOR RPRODUCTION. DISCAL OSURF. OR USE. | STANDARD DIMODIFIED CUSTOM